


Idler frames

Version:

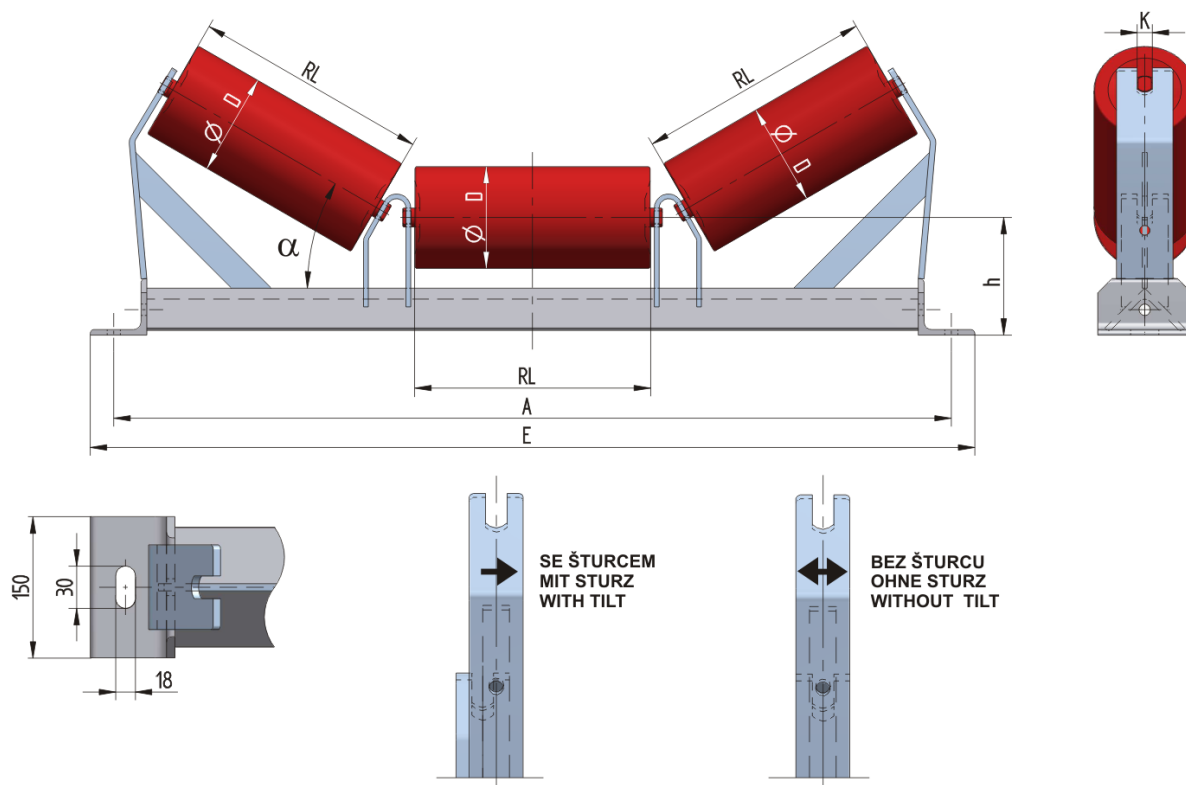

BB(mm)	Inclination°	D(mm)	RL(mm)	h(mm)	A(mm)	E(mm)	m(kg)	Artikl
1200	15	133,159	465	205	1530	1590	36.00	L1012015205
1200	20	133,159	465	205	1530	1590	36.50	L1012020205
1200	25	133,159	465	205	1530	1590	37.50	L1012025205
1200	30	133,159	465	205	1530	1590	38.60	L1012030205
1200	35	133,159	465	205	1530	1590	39.90	L1012035205
1200	40	133,159	465	205	1530	1590	41.30	L1012040205
1200	45	133,159	465	205	1530	1590	42.30	L1012045205
1400	15	133,159	530	205	1730	1790	39.20	L1014015205
1400	20	133,159	530	205	1730	1790	40.30	L1014020205
1400	25	133,159	530	205	1730	1790	41.20	L1014025205
1400	30	133,159	530	205	1730	1790	42.50	L1014030205
1400	35	133,159	530	205	1730	1790	43.80	L1014035205
1400	40	133,159	530	205	1730	1790	45.00	L1014040205
1400	45	133,159	530	205	1730	1790	46.50	L1014045205
1600	15	133,159	600	205	1980	2040	43.40	L1016015205
1600	20	133,159	600	205	1980	2040	44.50	L1016020205
1600	25	133,159	600	205	1980	2040	45.50	L1016025205
1600	30	133,159	600	205	1980	2040	46.90	L1016030205
1600	35	133,159	600	205	1980	2040	48.00	L1016035205

1600	40	133,159	600	205	1980	2040	49.50	L1016040205
1600	45	133,159	600	205	1980	2040	51.20	L1016045205
1800	15	133,159	670	205	2180	2240	47.00	L1018015205
1800	20	133,159	670	205	2180	2240	48.10	L1018020205
1800	25	133,159	670	205	2180	2240	49.10	L1018025205
1800	30	133,159	670	205	2180	2240	50.80	L1018030205
1800	35	133,159	670	205	2180	2240	52.30	L1018035205
1800	40	133,159	670	205	2180	2240	53.50	L1018040205
1800	45	133,159	670	205	2180	2240	55.50	L1018045205
2000	15	133,159	750	205	2420	2490	51.20	L1020015205
2000	20	133,159	750	205	2420	2490	52.90	L1020020205
2000	25	133,159	750	205	2420	2490	53.90	L1020025205
2000	30	133,159	750	205	2420	2490	55.40	L1020030205
2000	35	133,159	750	205	2420	2490	57.20	L1020035205
2000	40	133,159	750	205	2420	2490	59.00	L1020040205
2000	45	133,159	750	205	2420	2490	60.50	L1020045205