


Idler frames PAL

U70/50/4-DIN 59413

Version: 2020-11-03

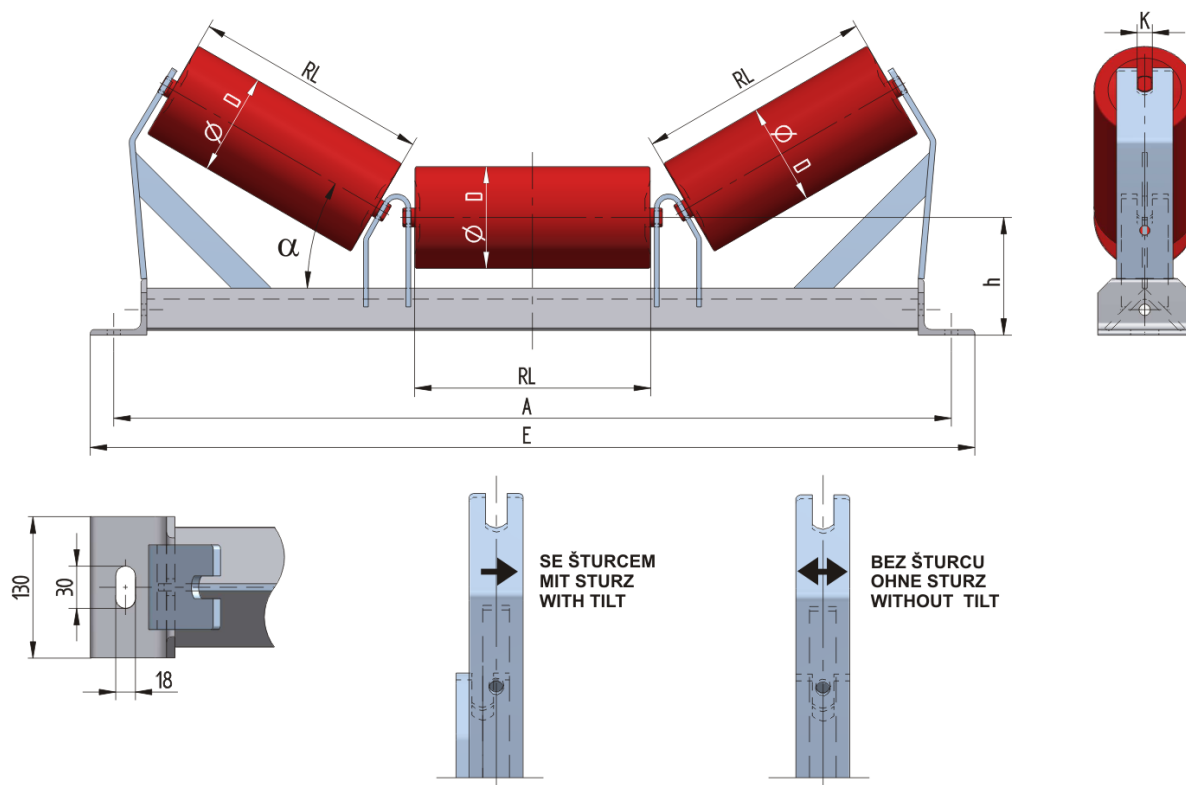

BB(mm)	Inclination°	D(mm)	RL(mm)	h(mm)	A(mm)	E(mm)	m(kg)	Artikl
800	15	108,133,159	315	160	1090	1140	17.30	L808015160
800	20	108,133,159	315	160	1090	1140	17.45	L808020160
800	25	108,133,159	315	160	1090	1140	18.10	L808025160
800	30	108,133,159	315	160	1090	1140	18.39	L808030160
800	35	108,133,159	315	160	1090	1140	18.93	L808035160
800	40	108,133,159	315	160	1090	1140	19.33	L808040160
800	45	108,133,159	315	160	1090	1140	19.83	L808045160
1000	15	108,133,159	380	160	1290	1340	19.16	L810015160
1000	20	108,133,159	380	160	1290	1340	19.71	L810020160
1000	25	108,133,159	380	160	1290	1340	20.24	L810025160
1000	30	108,133,159	380	160	1290	1340	20.70	L810030160
1000	35	108,133,159	380	160	1290	1340	21.33	L810035160
1000	40	108,133,159	380	160	1290	1340	21.73	L810040160
1000	45	108,133,159	380	160	1290	1340	22.35	L810045160
1200	15	108,133,159	465	160	1530	1590	21.86	L812015160
1200	20	108,133,159	465	160	1530	1590	22.39	L812020160
1200	25	108,133,159	465	160	1530	1590	23.06	L812025160
1200	30	108,133,159	465	160	1530	1590	23.62	L812030160
1200	35	108,133,159	465	160	1530	1590	24.42	L812035160

1200	40	108,133,159	465	160	1530	1590	24.93	L812040160
1200	45	108,133,159	465	160	1530	1590	25.67	L812045160
1400	15	108,133,159	530	160	1730	1790	24.09	L814015160
1400	20	108,133,159	530	160	1730	1790	24.87	L814020160
1400	25	108,133,159	530	160	1730	1790	25.44	L814025160
1400	30	108,133,159	530	160	1730	1790	26.10	L814030160
1400	35	108,133,159	530	160	1730	1790	26.90	L814035160
1400	40	108,133,159	530	160	1730	1790	27.65	L814040160
1400	45	108,133,159	530	160	1730	1790	28.30	L814045160
1600	15	108,133,159	600	160	1980	2040	26.63	L816015160
1600	20	108,133,159	600	160	1980	2040	27.28	L816020160
1600	25	108,133,159	600	160	1980	2040	28.15	L816025160
1600	30	108,133,159	600	160	1980	2040	28.96	L816030160
1600	35	108,133,159	600	160	1980	2040	29.75	L816035160
1600	40	108,133,159	600	160	1980	2040	30.42	L816040160
1600	45	108,133,159	600	160	1980	2040	31.26	L816045160