


Idler frames

Version:

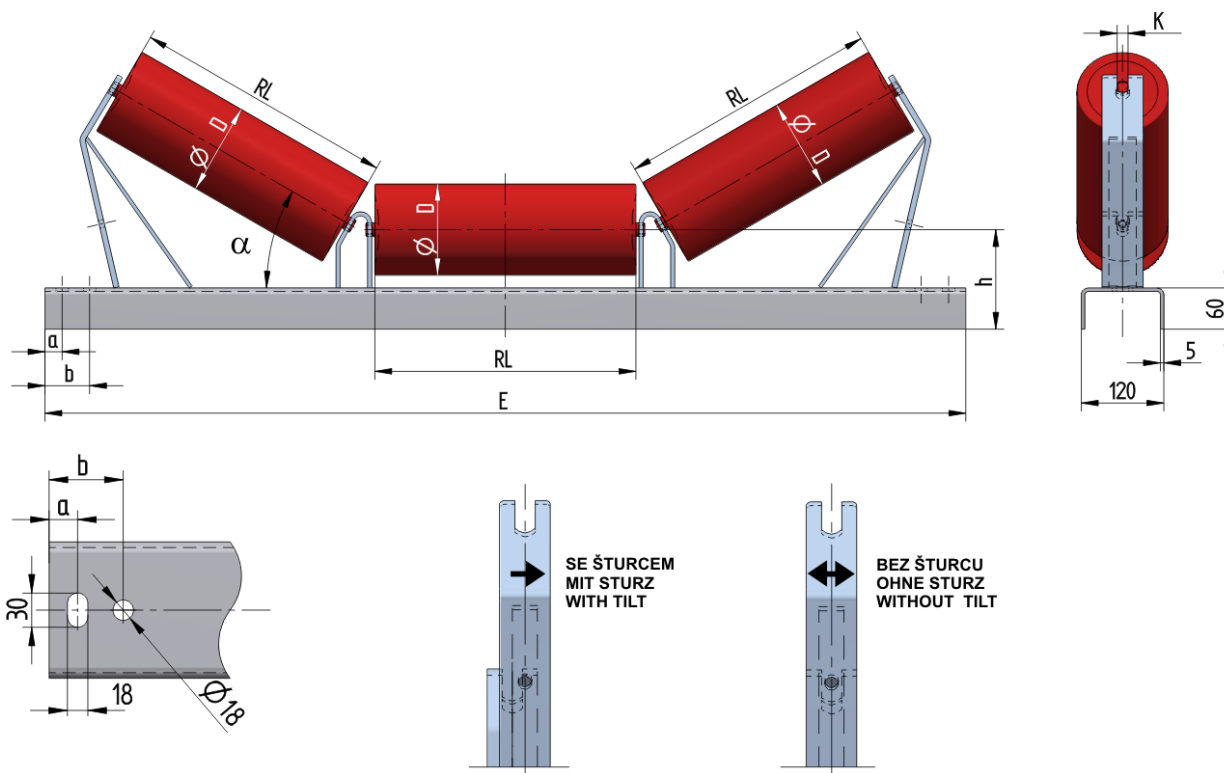

BB(mm)	Inclination°	D(mm)	RL(mm)	h(mm)	a(mm)	b(mm)	E(mm)	m(kg)	Artikl
1000	15	89,108,133	380	145	25	65	1340	15.10	PUT10015145
1000	20	89,108,133	380	145	25	65	1340	15.40	PUT10020145
1000	25	89,108,133	380	145	25	65	1340	15.80	PUT10025145
1000	30	89,108,133	380	145	25	65	1340	16.10	PUT10030145
1000	35	89,108,133	380	145	25	65	1340	16.40	PUT10035145
1000	40	89,108,133	380	145	25	65	1340	17.00	PUT10040145
1000	45	89,108,133	380	145	25	65	1340	17.30	PUT10045145
1200	15	89,108,133	465	145	30	65	1590	17.50	PUT12015145
1200	20	89,108,133	465	145	30	65	1590	17.90	PUT12020145
1200	25	89,108,133	465	145	30	65	1590	18.20	PUT12025145
1200	30	89,108,133	465	145	30	65	1590	18.70	PUT12030145
1200	35	89,108,133	465	145	30	65	1590	19.30	PUT12035145
1200	40	89,108,133	465	145	30	65	1590	19.60	PUT12040145
1200	45	89,108,133	465	145	30	65	1590	20.00	PUT12045145
1400	15	89,108,133	530	145	30	65	1790	19.30	PUT14015145
1400	20	89,108,133	530	145	30	65	1790	19.80	PUT14020145
1400	25	89,108,133	530	145	30	65	1790	20.30	PUT14025145
1400	30	89,108,133	530	145	30	65	1790	20.70	PUT14030145
1400	35	89,108,133	530	145	30	65	1790	21.20	PUT14035145

1400	40	89,108,133	530	145	30	65	1790	21.80	PUT14040145
1400	45	89,108,133	530	145	30	65	1790	22.20	PUT14045145
1600	15	89,108,133	600	145	30	65	2040	21.50	PUT16015145
1600	20	89,108,133	600	145	30	65	2040	22.10	PUT16020145
1600	25	89,108,133	600	145	30	65	2040	22.70	PUT16025145
1600	30	89,108,133	600	145	30	65	2040	23.20	PUT16030145
1600	35	89,108,133	600	145	30	65	2040	23.80	PUT16035145
1600	40	89,108,133	600	145	30	65	2040	24.40	PUT16040145
1600	45	89,108,133	600	145	30	65	2040	24.90	PUT16045145