


Idler frames PAL

U70/50/4-DIN 59413

Version: 2020-11-03

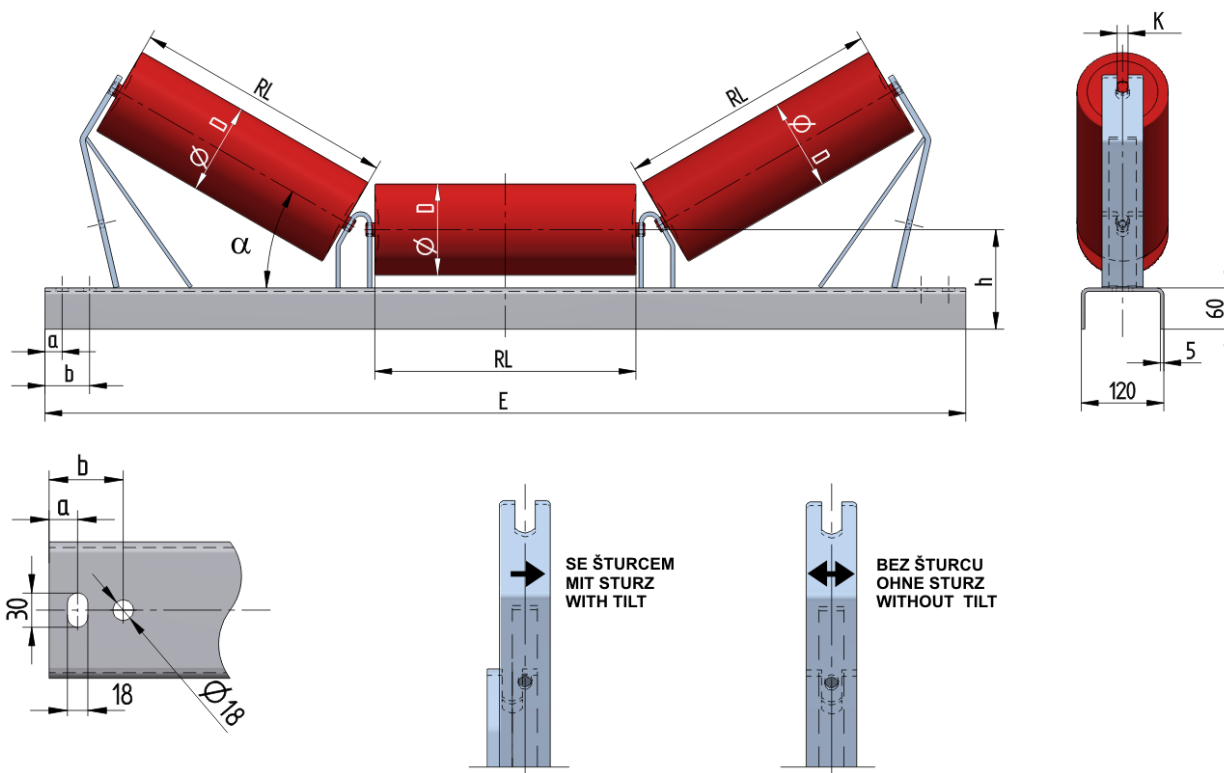

BB(mm)	Inclination°	D(mm)	RL(mm)	h(mm)	a(mm)	b(mm)	E(mm)	m(kg)	Artikl
1000	15	89,108,133,159	380	160	25	65	1340	15.40	PUT10015160
1000	20	89,108,133,159	380	160	25	65	1340	15.70	PUT10020160
1000	25	89,108,133,159	380	160	25	65	1340	16.00	PUT10025160
1000	30	89,108,133,159	380	160	25	65	1340	16.40	PUT10030160
1000	35	89,108,133,159	380	160	25	65	1340	16.70	PUT10035160
1000	40	89,108,133,159	380	160	25	65	1340	17.20	PUT10040160
1000	45	89,108,133,159	380	160	25	65	1340	17.70	PUT10045160
1200	15	89,108,133,159	465	160	30	65	1590	17.80	PUT12015160
1200	20	89,108,133,159	465	160	30	65	1590	18.33	PUT12020160
1200	25	89,108,133,159	465	160	30	65	1590	18.60	PUT12025160
1200	30	89,108,133,159	465	160	30	65	1590	19.16	PUT12030160
1200	35	89,108,133,159	465	160	30	65	1590	19.40	PUT12035160
1200	40	89,108,133,159	465	160	30	65	1590	20.10	PUT12040160
1200	45	89,108,133,159	465	160	30	65	1590	20.40	PUT12045160
1400	15	89,108,133,159	530	160	30	65	1790	19.50	PUT14015160
1400	20	89,108,133,159	530	160	30	65	1790	20.10	PUT14020160
1400	25	89,108,133,159	530	160	30	65	1790	20.60	PUT14025160
1400	30	89,108,133,159	530	160	30	65	1790	21.10	PUT14030160
1400	35	89,108,133,159	530	160	30	65	1790	21.60	PUT14035160

1400	40	89,108,133,159	530	160	30	65	1790	22.10	PUT14040160
1400	45	89,108,133,159	530	160	30	65	1790	22.60	PUT14045160
1600	15	89,108,133,159	600	160	30	65	2040	21.90	PUT16015160
1600	20	89,108,133,159	600	160	30	65	2040	22.40	PUT16020160
1600	25	89,108,133,159	600	160	30	65	2040	23.00	PUT16025160
1600	30	89,108,133,159	600	160	30	65	2040	23.50	PUT16030160
1600	35	89,108,133,159	600	160	30	65	2040	24.10	PUT16035160
1600	40	89,108,133,159	600	160	30	65	2040	24.80	PUT16040160
1600	45	89,108,133,159	600	160	30	65	2040	25.30	PUT16045160