


Idler frames

Version:

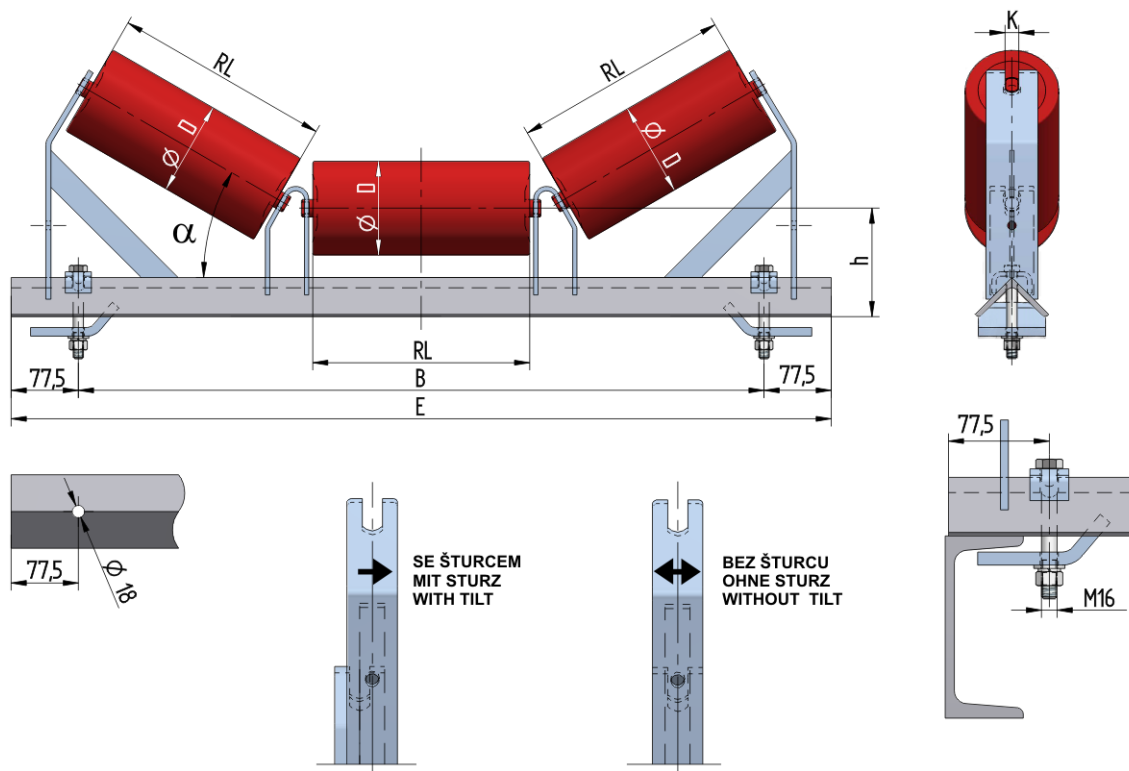

BB(mm)	Inclination°	D(mm)	RL(mm)	h(mm)	B(mm)	E(mm)	m(kg)	Artikl
1000	15	89,108,133,159	380	175	1190	1345	29.90	VAL1010015175
1000	20	89,108,133,159	380	175	1190	1345	30.30	VAL1010020175
1000	25	89,108,133,159	380	175	1190	1345	32.00	VAL1010025175
1000	30	89,108,133,159	380	175	1190	1345	33.40	VAL1010030175
1000	35	89,108,133,159	380	175	1190	1345	34.30	VAL1010035175
1000	40	89,108,133,159	380	175	1190	1345	35.20	VAL1010040175
1000	45	89,108,133,159	380	175	1190	1345	37.43	VAL1010045175
1200	15	89,108,133,159	465	175	1440	1595	33.80	VAL1012015175
1200	20	89,108,133,159	465	175	1440	1595	36.10	VAL1012020175
1200	25	89,108,133,159	465	175	1440	1595	37.10	VAL1012025175
1200	30	89,108,133,159	465	175	1440	1595	38.00	VAL1012030175
1200	35	89,108,133,159	465	175	1440	1595	39.00	VAL1012035175
1200	40	89,108,133,159	465	175	1440	1595	40.30	VAL1012040175
1200	45	89,108,133,159	465	175	1440	1595	41.50	VAL1012045175
1400	15	89,108,133,159	530	175	1640	1795	37.10	VAL1014015175
1400	20	89,108,133,159	530	175	1640	1795	39.50	VAL1014020175
1400	25	89,108,133,159	530	175	1640	1795	40.70	VAL1014025175
1400	30	89,108,133,159	530	175	1640	1795	41.70	VAL1014030175
1400	35	89,108,133,159	530	175	1640	1795	43.00	VAL1014035175

1400	40	89,108,133,159	530	175	1640	1795	44.30	VAL1014040175
1400	45	89,108,133,159	530	175	1640	1795	45.50	VAL1014045175
1600	15	89,108,133,159	600	175	1890	2045	41.30	VAL1016015175
1600	20	89,108,133,159	600	175	1890	2045	43.70	VAL1016020175
1600	25	89,108,133,159	600	175	1890	2045	45.10	VAL1016025175
1600	30	89,108,133,159	600	175	1890	2045	46.20	VAL1016030175
1600	35	89,108,133,159	600	175	1890	2045	47.60	VAL1016035175
1600	40	89,108,133,159	600	175	1890	2045	49.30	VAL1016040175
1600	45	89,108,133,159	600	175	1890	2045	50.60	VAL1016045175
1800	15	89,108,133,159	670	175	2090	2245	44.60	VAL1018015175
1800	20	89,108,133,159	670	175	2090	2245	47.30	VAL1018020175
1800	25	89,108,133,159	670	175	2090	2245	48.70	VAL1018025175
1800	30	89,108,133,159	670	175	2090	2245	50.10	VAL1018030175
1800	35	89,108,133,159	670	175	2090	2245	51.60	VAL1018035175
1800	40	89,108,133,159	670	175	2090	2245	53.40	VAL1018040175
1800	45	89,108,133,159	670	175	2090	2245	54.80	VAL1018045175