
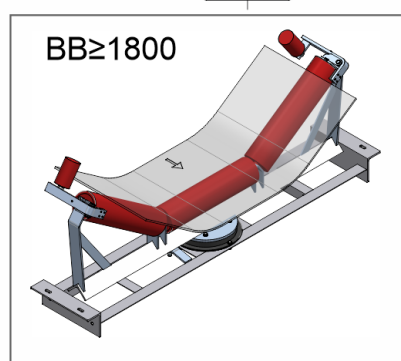



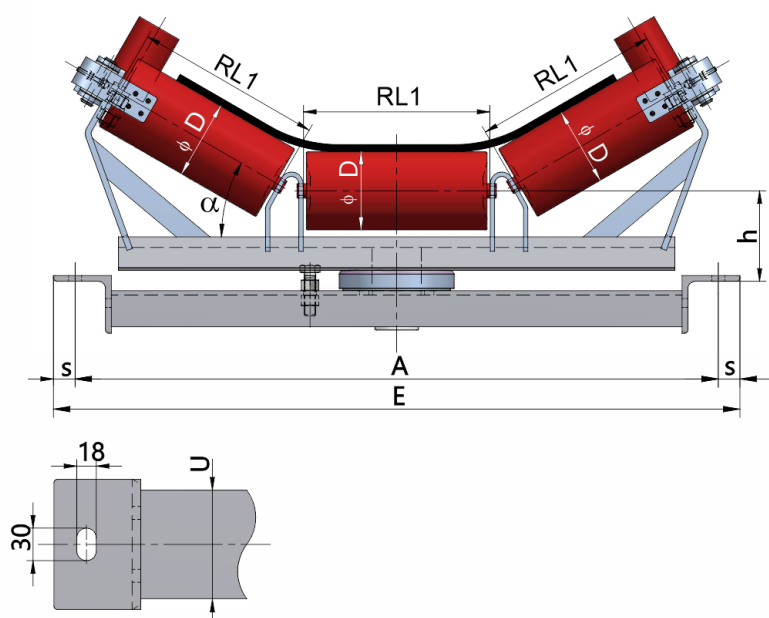

The weight **m** is given without rollers!

LES004025125-089

Base	U100
Standard	
Belt width BB (mm)	400
Inclination °	25
Roller length RL1 (mm)	160
Base U (mm)	U100
Dimension P (mm)	150
Hight of roller shaft above the infrastructure h (mm)	125
Pricipal dimensions A (mm)	640
Base length E (mm)	700
Pricipal dimensions s (mm)	30
Pivot	OTV-30
Guard rollerGuard roller	63,5x100/M16
Weight (kg)	0