
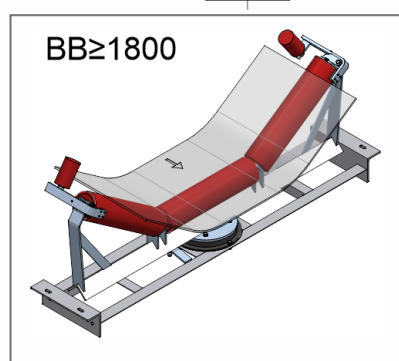



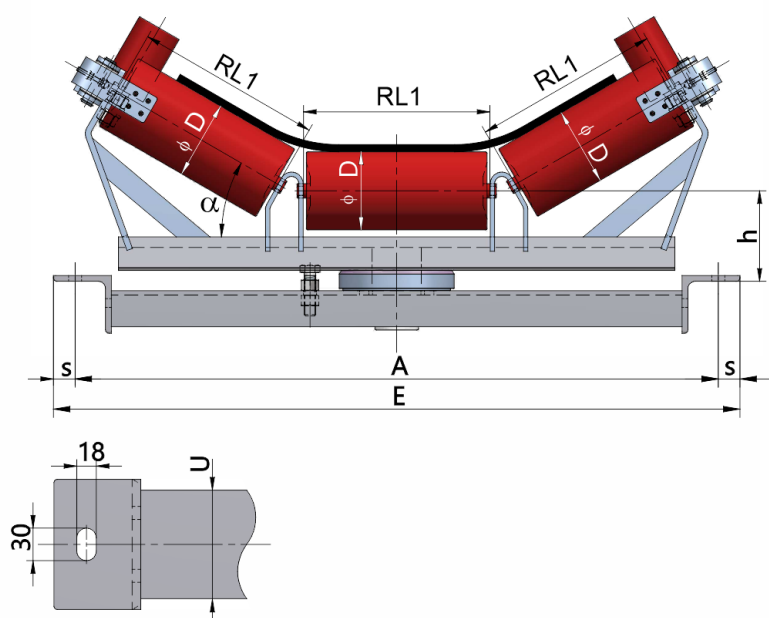

The weight **m** is given without rollers!

## LESO08025135-108

|                                                                       |              |
|-----------------------------------------------------------------------|--------------|
| Weight ( <b>kg</b> )                                                  | 0            |
| Belt width <b>BB</b> ( <b>mm</b> )                                    | 800          |
| Inclination °                                                         | 25           |
| Roller length <b>RL1</b> ( <b>mm</b> )                                | 315          |
| Base <b>U</b> ( <b>mm</b> )                                           | U100         |
| Dimension <b>P</b> ( <b>mm</b> )                                      | 160          |
| Hight of roller shaft above the infrastructure <b>h</b> ( <b>mm</b> ) | 135          |
| Pricipal dimensions <b>A</b> ( <b>mm</b> )                            | 1090         |
| Base length <b>E</b> ( <b>mm</b> )                                    | 1150         |
| Pricipal dimensions <b>s</b> ( <b>mm</b> )                            | 30           |
| Pivot                                                                 | OTV-30       |
| Guard roller                                                          | 63,5x100/M16 |