


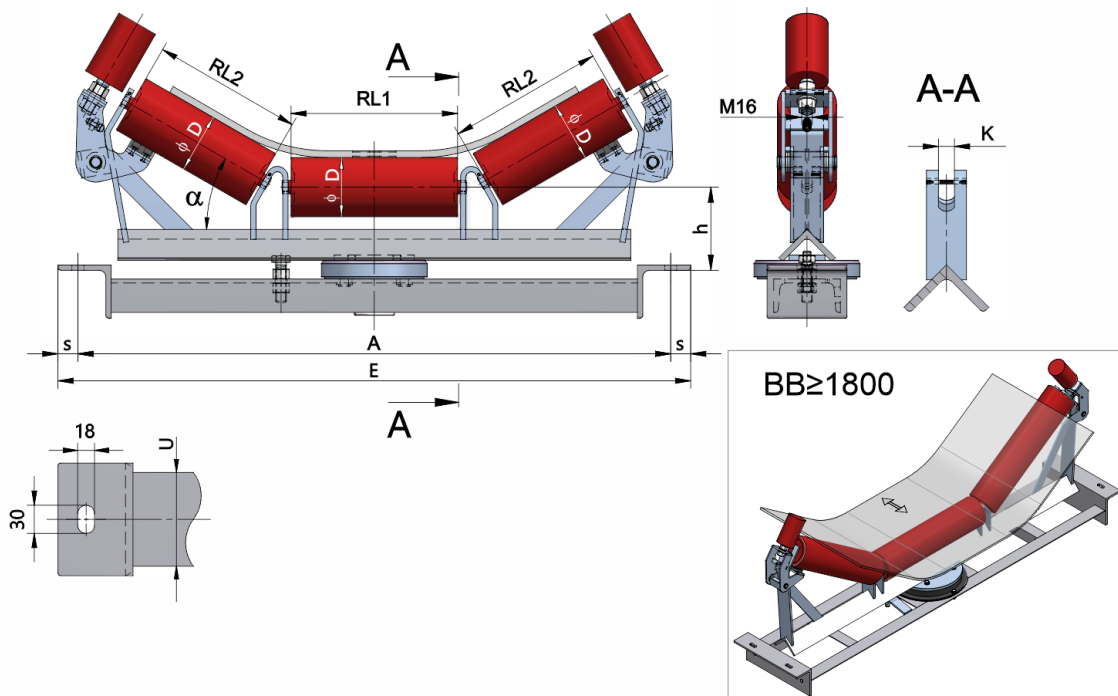

The weight **m** is given without rollers!

LESOR04025125-063

Base	U100
Standard	DIN 1026 / EN 10365
Belt width BB (mm)	400
Inclination °	25
Roller length RL1 (mm)	160
Roller length RL2 (mm)	135
Hight of roller shaft above the infrastructure h (mm)	125
Bottom base (U)	U100
Pricipal dimensions A (mm)	640
Base length E (mm)	700
Pricipal dimensions s (mm)	30
Pivot	OTV-30
Guard rollerGuard roller	63,5x100/M16
Weight (kg)	0