


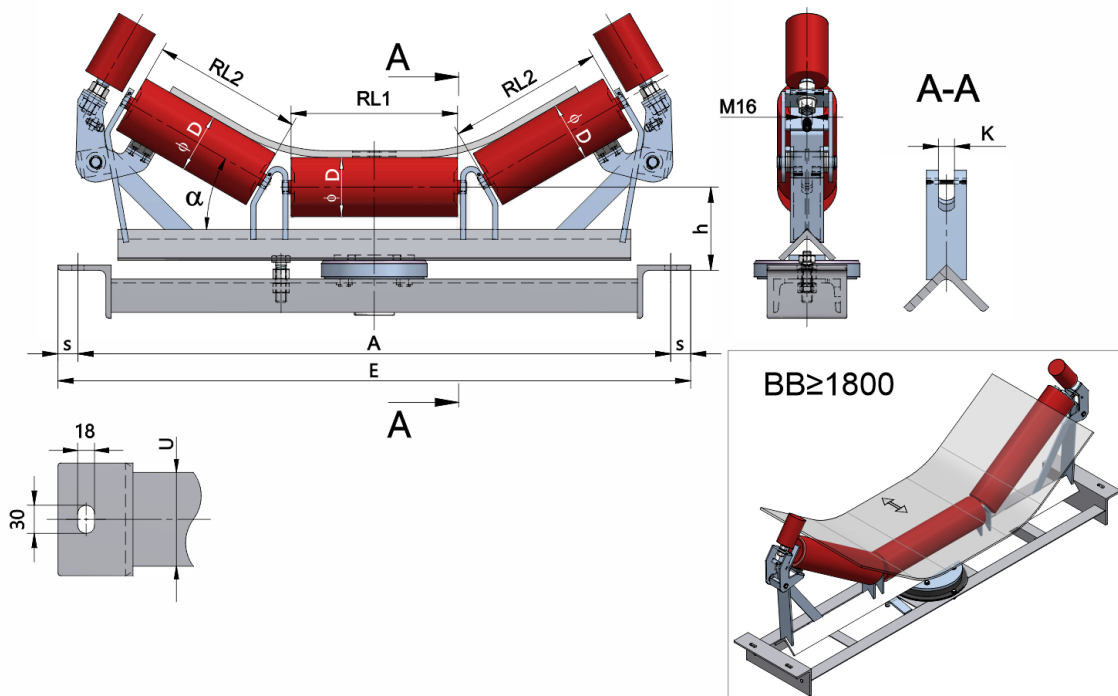

The weight **m** is given without rollers!

## LESOR05030125-063

|                                                              |                     |
|--------------------------------------------------------------|---------------------|
| Base                                                         | U100                |
| Standard                                                     | DIN 1026 / EN 10365 |
| Belt width <b>BB (mm)</b>                                    | 500                 |
| Inclination °                                                | 30                  |
| Roller length <b>RL1 (mm)</b>                                | 200                 |
| Roller length <b>RL2 (mm)</b>                                | 175                 |
| Hight of roller shaft above the infrastructure <b>h (mm)</b> | 125                 |
| Bottom base ( <b>U</b> )                                     | U100                |
| Pricipal dimensions <b>A (mm)</b>                            | 740                 |
| Base length <b>E (mm)</b>                                    | 800                 |
| Pricipal dimensions <b>s (mm)</b>                            | 30                  |
| Pivot                                                        | OTV-30              |
| Guard rollerGuard roller                                     | 63,5x100/M16        |
| Weight ( <b>kg</b> )                                         | 0                   |